


TECHNICAL HOSE PRODUCTS

BRIDGE DRAINAGE HOSE

Connection element to drain waste water from bridge structures. Highly flexible, compressible version with and without widened endings. Operation as a rule at zero-pressure. Temperature resistant from -35°C to $+100^{\circ}\text{C}$.

- Construction:
- Tube in black, faeces-resistant quality
 - Fabric inlays
 - Concealed steel spiral
 - Abrasion-resistant, weather-resistant cover
 - Interior and exterior corrugated

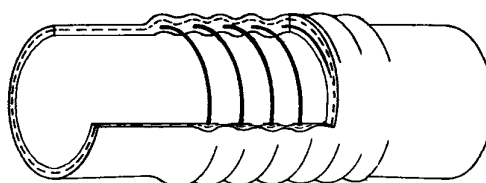

ND [mm]	Couplings IØ	Wall thickness*	Vacuum [bar]	Bend. radius approx. [mm]	Lengths [mm]
100	112	5	0.2	150	from 150
125	137	5	0.2	188	from 150
150	150	5	0.2	225	from 150
150	162	5	0.2	225	from 150
150	175	5	0.2	225	from 150
200	212	5	0.2	300	from 150
250	276	5	0.2	375	from 150
300	328	5	0.2	450	from 150
400	429	5	0.2	600	from 150
500	500	5	0.2	750	from 150

*) Coupling wall

In fixed lengths with cuffed ends and/or widened hose endings.



Other versions and dimensions on request.