


MATERIALS HANDLING HOSES

MATERIALS HANDLING HOSE - TYPE SILEIT

For suction of a wide range of media in the industrial field (dust, sawdust etc.). Especially flexible version for easy handling with good tensile strength and particularly small bending radiuses. Temperature resistant from -35°C to $+80^{\circ}\text{C}$.

- Construction:
- Abrasion-resistant, electrically conductive tube
 - Fabric inlays
 - Concealed steel spiral
 - UV, ozone und weather-resistant, electrically conductive cover
 - Interior smooth, exterior corrugated

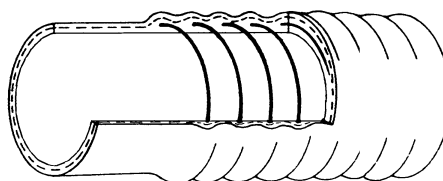

ND [mm]	Wall thickness	WP [bar]	Vacuum [bar]	Bend. radius [mm]	Max. length [m]
40	3	1.5	0.8	120	15
50	3	1.5	0.8	150	15
60	3	1.5	0.8	180	15
70	3	1.5	0.8	210	15
75	3	1.5	0.8	225	15
80	3	1.5	0.8	240	15
90	3.5	1.5	0.8	270	15
100	3.5	1.5	0.6	300	15
110	3.5	1.5	0.6	330	15
120	4	1.5	0.6	360	15
125	4	1.5	0.6	375	15
150	4	1.5	0.6	450	10
175	4	1.5	0.6	525	10
200	4	1.5	0.6	600	10
250	4.5	1.5	0.6	750	10
300	4.5	1.0	0.5	900	10
350	4.5	1.0	0.5	1050	5
400	5	-	0.4	1200	5

Cut to length with cuffed ends and/or widened hose endings.



Other versions and dimensions on request.