


OIL AND FUEL HOSES

OIL HOSE

For all types of mineral oil products, especially technical oils and lubricants, petrol and benzole mixtures 50 : 50, leaded and unleaded fuels with an aromatic content up to 50%, diesel fuels, heating oils, hydraulic oils based on mineral oil. Barrel-polishable, vacuum-constant finish. Temperature resistant from -35°C to +90°C. Conforms to DIN EN 12115.

- Construction:
- Oil & petrol-resistant, conductive NBR tube
 - Tension and pressure resistant fabric inlays
 - Embedded copper wire
 - Weather-resistant, abrasion-resistant, conductive CR cover
 - Interior and exterior smooth, fabric patterned

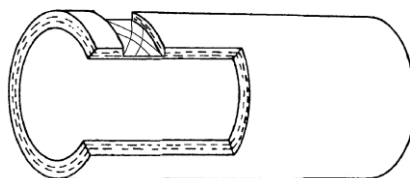

ND [mm]	Wall thickness	WP [bar]	Vacuum [bar]	Bend. radius approx.	Max. length [m]
19	6	25	0.6	125	40
25	6	25	0.5	150	40
32	6	25	0.3	175	40
35	6	25	0.3	200	40
38	6.5	25	0.3	225	40
40	7	25	0.3	240	40
45	7	25	0.3	265	40
50	8	25	0.3	275	40
63	8	25	-	300	40
75	8	20	-	350	40
100	8	16	-	450	40

Supplied by the roll or cut to length
Also available as spiral hose.



Other versions and dimensions on request.